

DC4U Conservatories Features & Benefits


- 10 year guarantee on all White models
- 10 year guarantee on all Woodgrain models
- Toughened safety glass to BS 6206A (energy saving K glass is also available)
- All sealed glass units are 28mm to BS EN 1279 with 4mm glass (20mm also available)
- All Panels and Doors are factory glazed
- Available in White, Rosewood, Traditional Oak, Oak on White or Rosewood on White.
- Range of panel styles available and optional extras such as decorative glass designs and obscure privacy glass
- Detailed installation instructions, plans and installation DVD supplied
- All opening Vents have espagnolette locking mechanisms with a key lock and a night-vent facility
- French doors with multi-point locking system (approved by the Associations of British Insurers)
- All Conservatories are supplied with 2 opening Vents as standard, with an option to upgrade if required
- Roof Vents available
- All Fixings, Sealants, Rainwater goods, Finials, Crestings and Flashing Tape are supplied
- Roofing manufactured from structural Aluminium to BS 8118 and BS EN 755-2 and is supplied with PVC-U cappings
- A Classic Ogee Gutter is supplied with concealed Brackets
- Polycarbonate available in Clear, Bronze, Opal, Bronze Opal or Heatsheild
- Glass roofs available in Celsius high performance glazing.

DC4U's Unique Conservatory Framing System

- Panels slide onto pre-routed Sill
- 1/4 turn Buttons lock Panels together
- No screws required
- No drilling required
- Can dramatically reduce fitting time
- Free installation DVD with every conservatory



Connecting Panels to Sill

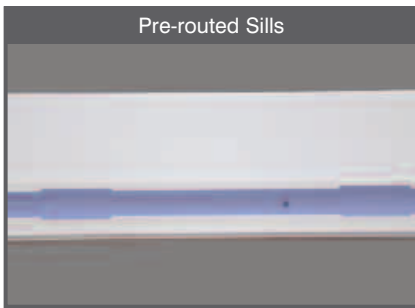

Pre-routed Sills

Sills are pre-routed and cut to size.



Sill Support Blocks locate Panel onto Sill


Panels ready for assembly with factory Sill Support Blocks.



Panels slide into position


Panels engage into Sill and slide into position.

Connecting Panels

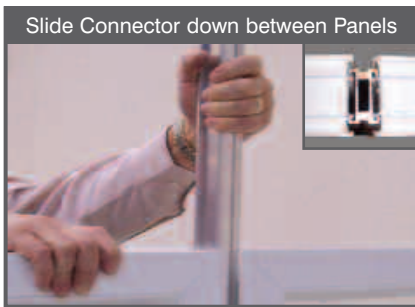

Slide Connector down between Panels

Aluminium Connectors slide down between Panels holding them together.

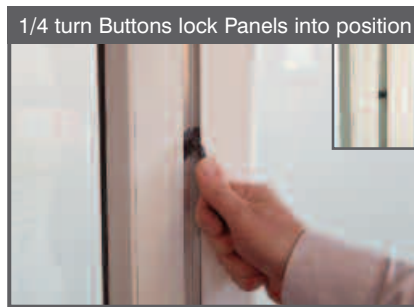

1/4 turn Buttons lock Panels into position

Rotating the 1/4 turn Button with an allen key secures the Panels and ensures they are the correct distance apart.




Cover strip locks in place

Once locked into position the Buttons are used to locate the cover strip.



No screws required



No drilling required



Sill Support Blocks lock Panels into position



1/4 turn Buttons lock Panels together



Quicker to install